NHentrance

HIGH SPEED PVC DOOR

High performance High speed door advocate



Comprehensive range of FRAME work



Comprehensive range of PVC roll up door

Performance PVC · impact & scratch resistance Thermal insulation Noise insulation · high resistance to water Long durability Anti-UV PVC · Impact & scratch resistance Thermal insulation Flexibility Noise insulation Long durability · High resistance to UV Anti-bacterial PVC · impact & scratch resistance Thermal insulation · Flexibility · Noise insulation Long durability Anti-bacterial vinyl **Anti-static PVC** Thermal insulation · impact & scratch resistance · Flexibility Noise insulation Long durability · Static dissipative vinyl





Product Color





New Horizons high speed PVC door

providing multiple color options. Doors styles need to conformably buildings. Except for the below most frequently used colors, New Horizons also customize colors for satisfy the needs.










- ✓ Low energy
- ✓ Security
- Productivity
- ✓ Dampen noise and heat insulation
- Against cold, heat, wind, dust, rain, during in and out flow
- 2 years warranty






High Speed PVC Door is part of the entrance

New Horizons have a comprehensive range of well - priced high-quality PVC door products that include industrial door such as clean room door, cold room door, fantastic choice of as well as machine protection door self- repair high speed PVC door.

Emergency and safety sensor options are available to increase the practicality of this efficient operation

Introduction of product parameters

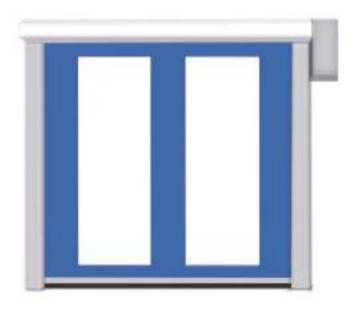

New Horizons specializes in the design and production of high speed PVC doors featuring high-speed partitioning capabilities. The cold splicing process makes the door curtain smoother and more aesthetically pleasing, while the segmented assembly reduces maintenance costs.

With excellent craftsmanship, professional equipment, and advanced safety features, our PVC doors are characterized by reliability, practicality, ease of operation, and low maintenance costs.

Explore our range of high-speed PVC doors to find the best solution for your specific needs, ensuring the perfect combination of speed, safety, and style.

Opening/closing speed	0.8m/s-1.5m/s
Control box	Digital tube, frequency conversion control system
Limit switch	Multi-turn absolute encoder
Power supply	220 V
Safety certification meets EN ISO12100	2010 standard
Test	The tested service cycle reaches 800, 000 times/year, 500 times/day
Wind resistance rating	Maximum level 6
Standard size	Maximum 5500X6500mm

Motor and control system



Operator



Control unit



Power cable



Expansion Board



Main Switch



Screw kit

APPLICATION AREA



NHentrance Co.,Ltd

Xianfeng Road, Wuxi, Jiangsu, China

(€) +86 189 1528 3688
(□) +86 138 0618 0623
(□) info@ehentrance.com